



# LUXE WIFI

1400, 12V SW



## USER MANUAL



[www.microtek.in](http://www.microtek.in)

**MICRO CONTROLLER / Micro Computer Inside:** Micro Computer based INTELLI PURE SINEWAVE LUXE LCD WIFI UPS is designed using latest state-of-the-art Technology for Better Performance and High Reliability. The INTELLI PURE SINEWAVE Technology used enhances the life of the battery and minimum effort has to be put for maintenance.

- ♦ Digital Signal Controller / Micro Computer Inside: Micro Computer based Intelligent Control Design.
- ♦ Pure Sine Wave Output.
- ♦ PWM Controlled multistage ATM (Automatic Trickle Mode) Charging.
- ♦ Display Indications (Status & Fault).
- ♦ Smart Overload Sense and Short Circuit Protection.
- ♦ Easily Serviceable and Auto Reset Feature.
- ♦ Mains Input Voltage Range Selection.

**Over Voltage Protection:** The UPS will switch to UPS mode & offers power from the battery when the mains voltage is too high.

**Over Load / Short Circuit Protection :** If the UPS is excessively overloaded in UPS mode or encounters a short circuit, it will go into protection mode. The output will be shut down in this case.

**Battery Deep Discharge / Over Charge Protection :** The UPS has in-built electronic protection circuit which protects the batteries from getting deep discharged or over charged.

## TECHNICAL SPECIFICATIONS

**Product** LUXE WIFI 1400, 12V SW  
**VA/Wattage** 1100VA/825W

Input voltage	(INV) (UPS)	80V~290V 180V~265V
Output Voltage on Mains mode		Same as input
Output Voltage on Backup mode		230V $\pm$ 10% @DC = 12V
Output frequency on Backup mode		50 Hz $\pm$ 0.5 Hz
Switching from Mains to UPS and from UPS to Mains		Automatic
Output waveform on Mains mode		Same as Input
Output waveform on Backup mode		Pure Sinewave
Battery Charging Current		10A/12A/15A/20A variety of current types can be Selected
Battery Type Selection Options		TUB/SMF/FLA-LC/Lithium
Protections		Overload/Short Circuit/Over Charge/ DC High Voltage/Over Temp./Backfeed
UPS Transfer Time		$\leq$ 15msec.
Browns Out Mains Voltage		80V $\pm$ 10V
Technology		Micro Computer Based Intelligent Control Design.
Auto Reset Feature		Yes
Operating Temperature		0~45°C

**NOTE:** \*Power Factor may vary depending upon the Load. \* Because of a policy of continuous product improvement, specifications are subject to change without notice.

## MICROTEK WIFI APP FEATURES

Take charge of your home's power supply anytime, anywhere. With our innovative APP, monitor and control your UPS effortlessly from your phone. Stay Connected, Stay in Control."





Scan QR code to  
download **Microtek  
WIFI APP** for **IOS** and  
**Android** devices.

- ♦ Turbo Charge (Enhance Charging Current to reduce time during emergency situations).
- ♦ Manage Home Fan Speed (Enable user to control the output power).
- ♦ Multiple User Login (Allows multiple users to access and control the inverter system).
- ♦ Display Charging / Backup Time (Provides information about the charging and discharging times of the batteries connected to the inverter).
- ♦ Enable High Power Mode (This feature is beneficial for handling high-demand situations or powering heavy-duty appliances).
- ♦ Holiday Mode (to minimize energy consumption while ensuring essential functions remain operational while away from home or on vacation).
- ♦ Battery Water Level Top-Up Reminder (helps maintain the health and longevity of the batteries).
- ♦ Receive Alarm Notification & Vibration Alert (Notifies users of any alarms or alerts related to the inverter system on their connected devices).
- ♦ Enables Forced Mains Cut (Allows users to remotely force a main cut-off of the inverter system in case of malfunctions or safety concerns).
- ♦ Performance Mode (User can manage Inverter output performance).
- ♦ Monitor Power Cut / Load Trends (Can see the power cut & load trend history in graphical form).
- ♦ Select UPS / Inverter mode (Effortlessly switch between UPS and inverter modes).
- ♦ User can mute the Inverter Beep Sound.
- ♦ Real time Status (User can see the real time status in mobile application).

## LOGIN PAGE


Access your Home UPS with ease through our user-friendly login page. Securely manage your power supply settings and preferences with simple authentication. Empowering you to control your energy needs effortlessly.

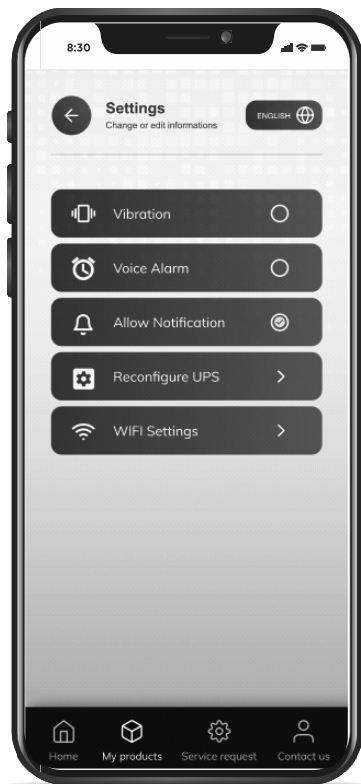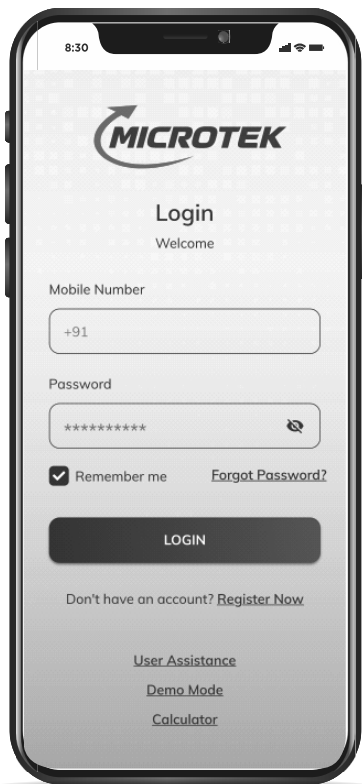



## STATUS PAGE

- a) Stay informed with our WIFI application Status Page. Track Real-Time Updates on your power supply directly from your mobile. Your peace of mind, at your fingertips.
- b) Can monitor Input Voltage, Battery, Output, Load and any fault (Low Battery / Overload / MCB Trip / Over Temperature / Short Circuit etc).

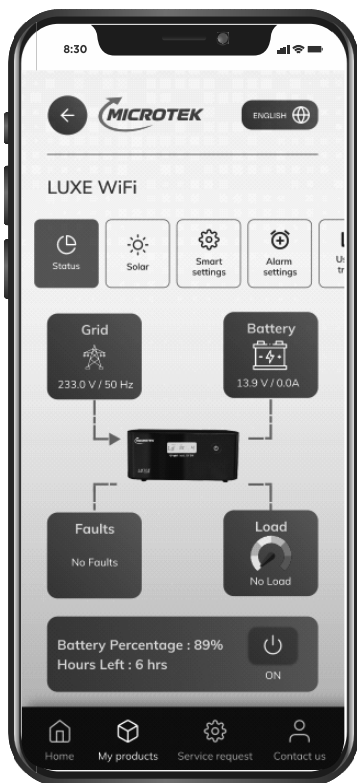


## SMART SETTING PAGE

Unlock the full potential of your Home UPS with our Smart Setting page. Tailor your power preferences to suit your lifestyle and needs with intuitive controls and advanced features. Simplify your energy management, elevate your experience.


- a) Force Main Cut: Can force a main cut-off remotely of the inverter system in case of Input Power supply abnormality and fluctuation.

- b) Turbo Charging Mode: Enhance charging current to reduce time during emergency situations.
- c) High Power Mode: Beneficial for handling high-demand situations or powering heavy-duty appliances for limited time.
- d) Holiday Mode: When inverter is not in use for long duration. Switch to holiday mode it will ensure saving of power and will also maintain your batteries in healthy condition.
- e) Mute Buzzer: Can mute the alert buzzer remotely.
- f) Inverter / UPS Mode: Effortlessly switch between UPS and inverter modes.
- g) Battery Type: Can lock battery setting to prevent manual error.

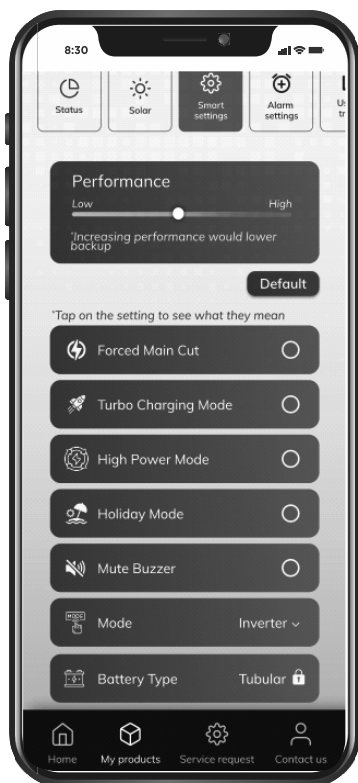

## ALARM SETTING PAGE

Easily customize your Home UPS alarm settings through our intuitive WIFI application. Set personalized alerts to keep you informed about critical events and ensure uninterrupted power supply. Your safety, your settings, all at your fingertips.

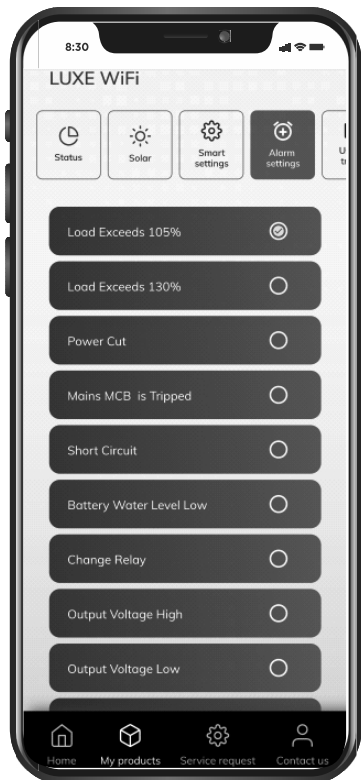



## USAGE TREND PAGE

Track your Load, Power cut trends effortlessly with our Usage Trend page. Empowering you to make informed decisions for efficient usage. Stay informed, stay in control with our intuitive interface.


## SERVICE REQUEST PAGE

Need assistance? Our Service Request page makes it easy to get help when you need it. Submit your requests quickly and efficiently, ensuring prompt attention to your Home UPS needs. Your satisfaction, our priority.

Can monitor your Complaints Status.

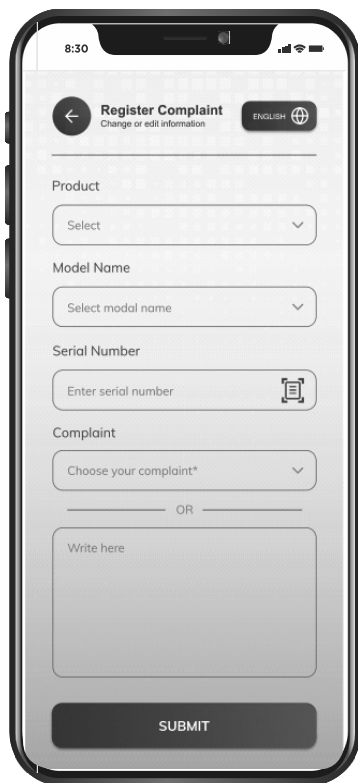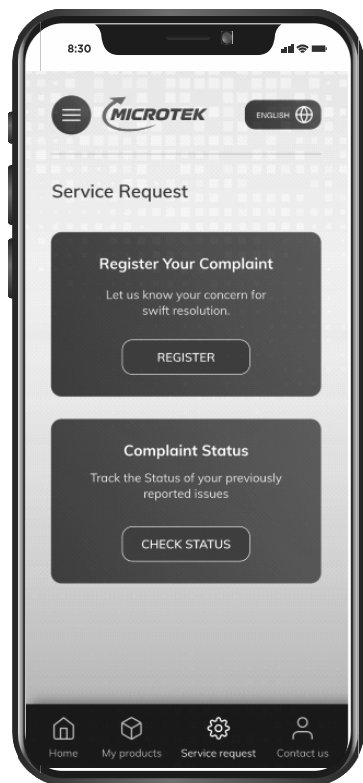

You can see your previous complaints also.

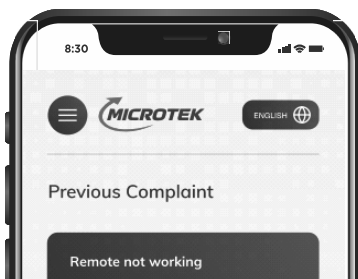


## FRONT PANEL

### 1. Power On/Off Switch.

- To changeover from UPS mode to Inverter mode: Press Power Button for 2secs.
- To Flick ON/OFF operation: Press Power Button for 500ms.

### 2. Smart LCD Display.



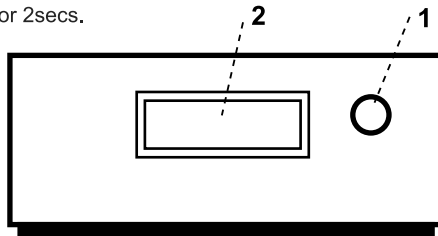





- To reconfigure / bind up Press Power Button for 50secs.








## LCD DISPLAY

CONDITIONS			LCD DISPLAY CONTENT	COMMENT
ALL Segments On				
Standby mode (only connect the battery @ON/OFF Switch:OFF)				Only this interface
Line standby mode	Power Switch OFF	Input voltage and Input freq. are in normal range		This three interfaces scroll display
Line mode	Power Switch ON	Input voltage and Input freq. are in normal range		This three interfaces scroll display
Battery mode		No Mains	Interface A 	This four interfaces scroll display
			Interface B 	
			Interface C 	
			Interface D 	


CONDITIONS			LCD DISPLAY CONTENT	COMMENT
Battery mode	Power Switch ON	Mains on, frequency normal but the voltage low out the normal range		This two interface and interface C and interface D scroll display (total 4 interfaces)
Battery mode	Power Switch ON	Mains on, frequency normal but the voltage high out the normal range		This two interface and interface C and interface D scroll display (total 4 interfaces)
Battery mode	Power Switch ON	Mains on, voltage normal, but the frequency low out the normal range		This two interface and interface C and interface D scroll display (total 4 interfaces)
Battery mode	Power Switch ON	Mains on, voltage normal, but the frequency high out the normal range		This two interface and interface C and interface D scroll display (total 4 interfaces)
Battery mode (warning)	Power Switch ON	Battery low warning		This two interface and interface A and interface B interface C and interface D scroll display (total 5 interfaces)
Battery mode (warning)	Power Switch ON	Water level low warning		This two interface and interface A and interface B interface C and interface D scroll display (total 5 interfaces)
Fault mode	Power Switch ON	Short circuit		The interface locked, only this interface
Fault mode	Power Switch ON	Inverter voltage High		The interface locked, only this interface
Fault mode	Power Switch ON	Inverter voltage Low		The interface locked, only this interface
Fault mode	Power Switch ON	Back-feed		The interface locked, only this interface
Fault mode	Power Switch ON	DC voltage High		The interface locked, only this interface
Fault mode	Power Switch ON	Overload warning		The interface locked, only this interface

CONDITIONS			LCD DISPLAY CONTENT	COMMENT
Fault mode	Power Switch ON	Overload shutdown	Continuously Glow 	The interface locked, only this interface
Fault mode	Power Switch ON	Battery Low shutdown	Continuously Glow 	The interface locked, only this interface
Fault mode	Power Switch ON and OFF	CB Trip	Continuously Glow  Blinking 	The interface locked, only this interface
Fault mode	Power Switch ON	Mains OTP (off charger)	Blinking 	The interface locked, only this interface
Fault mode	Power Switch ON	Mains OTP (burning risk)	Continuously Glow 	The interface locked, only this interface
Fault mode	Power Switch ON	Battery OTP Alarm	Blinking 	The interface locked, only this interface
Fault mode	Power Switch ON	Battery OTP Locking	Continuously Glow 	The interface locked, only this interface

## LCD DISPLAY WITH WIFI APP

CONDITIONS		LCD DISPLAY CONTENT		COMMENT
Line Mode	With the Wifi APP Connected	Forced Mains Cut		The Symbols are displayed when activated through the Wi-Fi application.
Batt. Mode & Line Mode		Configured with the App		The Symbols are displayed when activated through the Wi-Fi application.
		High Power Mode		The Symbols are displayed when activated through the Wi-Fi application.
		Buzzer Mute		The Symbols are displayed when activated through the Wi-Fi application.
Line Mode		Turbo Charging		The Symbols are displayed when activated through the Wi-Fi application.
Holi-day Mode		Inverter goes on Sleep Mode	DISPLAY OFF*	

## BACK PANEL

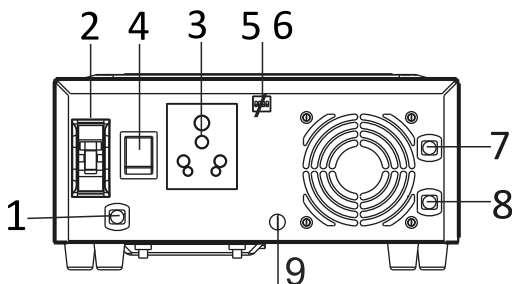

1. Mains Input Lead for AC input.
2. MCB/Circuit Breaker for Mains Overload, Short Circuit & Charger Protection.
3. Output socket for Load.
4. Rocker Switch used to select UPS or Bypass mode.
5. Charging Current Selection.

Pin1	Pin2	Charger Current
OFF	OFF	10A
OFF	ON	12A
ON	OFF	15A
ON	ON	20A

6. Battery Type Selection.

Pin3	Pin4	Battery Type
OFF	OFF	LITHIUM
OFF	ON	SMF
ON	OFF	FAL-LC
ON	ON	TUB

7. Positive "+" Battery Lead (UPS LUXE NEW 1000/1200/1400: 12V DC).
8. Negative "-" Battery Lead (UPS LUXE NEW 1000/1200/1400: 12V DC).
9. Battery Water Level Indicator (Optional).

**CAUTION:** Proper selection of switch position is recommended based on the battery manufacturers specifications, for proper backup and also to avoid any damage to the battery due to wrong selection.



## TROUBLE SHOOTING

Problem	Possible Cause / Action Suggested
<b>1. Main Supply is Normal but</b> a) UPS is working on battery mode b) MCB Trip	a) Dead wall socket, Line AC input Connections are loose / not proper. b) Check MCB at the Rear Panel. Reset to Switch on the output. If trips again, call auth. Service personnel to check short/overload in the output circuit.
<b>2. UPS trips freq. at Backup mode</b>	The load is more. Reduce the load & reset the UPS.
<b>3. UPS Mode but no power</b> a) Overload b) Low Battery c) Short Circuit d) OTP (Over Temperature Protection) e) Other Faults	a) Reduce the load and reset the UPS. b) Battery has discharged. Recharge the battery after mains restoration. Check the battery type selection pin location, reset to right setting. c) Remove the load & reset the UPS, if working normally, may be wrong wiring or load abnormal. If still short circuit, call auth. service personnel. d) Reduce the load & reset the UPS. Check working status of fan, if fan working abnormally call auth. service personnel. e) Reset the UPS, if still alarm buzzing, call auth. service personnel.
<b>4. Backup Time is Less</b>	Check battery water & charge the battery with mains, min. for 8-12 hours. If still the backup time is less, get the battery checked up by auth. service personnel.
<b>5. UPS does not Operate</b>	Check the battery & the mains connections. Internal problem. Bypass UPS as explained in the next section and call auth. service personnel.
<b>6. WIFIAPP not Connecting</b>	Check your internet connection. If the signal is strong, please reconfigure your device. If the device is configured correctly with your mobile and the router is not working, connect the SKU through Wifi directly by pressing Wifi direct pin or select available Wifi connectivity.


## BATTERY - INSTALLATION & CONNECTIONS

**CAUTION:** Battery Polarity must be checked before connections. Wrong Polarity connection with UPS will Cause Reverse Protection Fuse Blown and may lead to Fire Hazards.


**INSTALLATION SHALL BE DONE BY A KNOWLEDGEABLE PERSON.**

- Take precautions while connecting the thimble of battery cable to the battery post, avoid short circuit by spanner etc.

**BATTERY CONNECTIONS:**



**Lead Acid Type**



**Li-ion Type**


**NOTE: Recommended Battery:**

**Lead Acid Type: 12V System: 1x12V / 100AH-200AH**

**Li-ion Type: 12.8V System: 1x12.8V / 120AH**

# CONNECTION DIAGRAM FOR INSTALLATION

**TO BE DONE BY A COMPETENT & KNOWLEDGEABLE PERSON.**

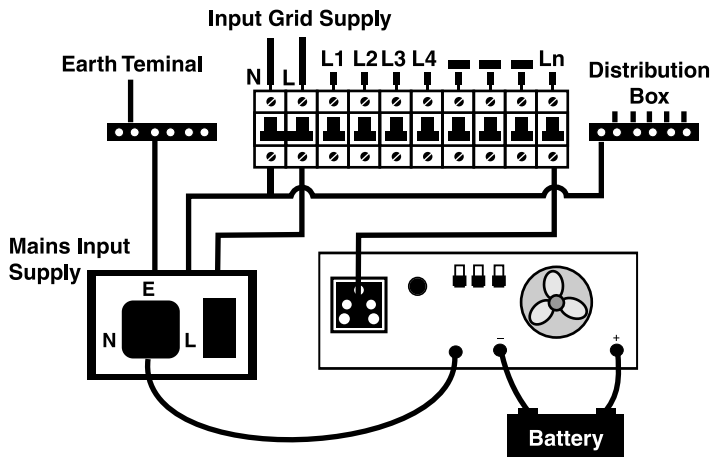

L - Mains Line l/p

N - Neutral

E - Earth

\* When the Push switch is at OFF position then it By-Pass the mains AC supply & charges the Battery.

\* When the Push switch is at ON position(Pressed) and is having alternating supply, It charges the battery and has mains By-Pass and when the alternating supply(mains) is not present at that instant it is ready for Backup.

## STEPS FOR UPS INSTALLATION

**TO BE DONE BY A COMPETENT & KNOWLEDGEABLE PERSON.**

- Switch OFF the supply to the distribution point to which the UPS unit is to be connected.
- For extra safety also remove the fuses from the line. Make absolutely sure with measurement that there is no power.
- A readily accessible disconnect device must be incorporated in all fixed input wiring. The disconnect device shall have a contact separation of at least 3mm. The UPS has automatic backfeed isolation but for extra safety a warning label can be added on all primary power isolators installed remote from the UPS to warn electrical maintenance personnel.
- Check the building wiring. Improper wiring will not prevent the UPS from operating but will limit its protection capability. Improper building wiring could result in equipment damage that is not covered in warranty.
- Connect the Battery/Batteries to UPS as per its requirement.
- Keep the front switch of UPS on OFF position.
- Connect the Load wire to the right hole of Output Socket located on the rear panel of UPS.
- Switch ON the front Switch of the UPS.
- Connect AC input wire to commercial mains socket.

## SERVICING / WARRANTY

Microtek International P. Ltd., warrants each instrument to be free from defects in materials and workmanship for a period of Three years after initial delivery. This obligation is limited to servicing any instrument or part returned to the authorised service center for that purpose and to making good any parts thereof which shall, within the warranty period, be returned to the company or authorised Service center under a written intimation and which to the company's satisfaction be found defective. The company reserves the right to decide as to whether the repair work should be carried out in the company's service center or at site or at any other place.

The freight incurred for to and fro dispatch will have to be borne by the customer and the transit risk for the material will rest with the customer.

The warranty will be invalidated if defects arising in company's opinion are by reasons of accident, abuse, misuse, neglect, Improper Installation (If not undertaken by the company or its representative), fire, flood, any other act of God and any other natural calamities. Further, this warranty does not extend to any instrument which has been repaired / tampered with by any agency/person not authorized by the company. The services given for the same will be paid service.

The warranty will last for a period of 36 months from the date of initial delivery/dispatch of the instrument if used within its specifications. The warranty for the replaced components will lapse along with that of the main instrument.

MICROTEK International P. Ltd., reserves the right to make changes in design and specifications without notice and without any obligation to install such changes on units previously supplied.

In no event will MICROTEK International P. Ltd., its distributors / dealers be liable for any loss or injury or damage caused to life or property or death & disability caused to any form of life for any reasons whatsoever. The company, its distributors / dealers will also not be liable for consequential damages or for any expenses incurred by the buyer or user, due to use or sale of products sold by MICROTEK International P. Ltd., directly or through its authorised Distributors / dealers or any third party.

## SAFETY INSTRUCTIONS

Always connect the UPS to a two pole, three-wire grounding mains socket, near by the product. The socket must be connected to appropriate branch protection (fuse/circuit-breaker). Connection to any other type of socket may result in a shock hazard.

To switch off the UPS output in emergency, use switch on the Front panel. Also disconnect the mains cord and battery wires.

Avoid installing the UPS in open, excessively humid place or where there is water or near flammable materials (plywood, chemicals, gasoline etc.). Care must be taken to ensure that the UPS is kept away from heat-emitting appliances such as a heater, blower, oven etc.

The unit must also be placed in a manner that it avoids exposure to sunlight. The place of installation should be well-ventilated & easily accessible for servicing. Ensure that ELCB/RCCB is not connected at either Input or Output, Only MCB upto 63A or MCCB above 100A to be used as per UPS capacity.

Foreign objects and water must not enter the UPS. Always ensure that objects containing liquid are avoided near the unit.

Place the Battery Compartment as near as possible to the UPS. Don't allow sparks near the Battery. Be sure not to come in contact with Battery Acid by any means.

Always Switch Off the UPS and disconnect mains when disconnecting the Battery.

Avoid connecting the stabilizer between Utility Power and UPS. The AVR of the stabilizer may cause rebooting of the Computer. The equipment must be earthed.

Do not open the UPS there are dangerous high voltages inside even when the power is OFF, Contact the Company only if it is not working properly.

Replace Batteries and the Fuse only with same Rating and Type.

Do not place UPS on a sloping shelf unless properly secured. Use perfect stand to hold the UPS.

Backfeed, See the warning label on the UPS.

## IMPORTANT

In the event of any instrument requiring service at our authorised service centre, the following procedure should be adopted:-

1. The instrument must be securely packed, preferably in its original packing. Also ensure that nothing inside packing is damaged. Please transport the product in its original packing to protect against shock, damage & Impact.
2. We reserve the right to charge the consignee for any damage incurred during transit.
3. The output of the UPS should never be connected to a generator or incoming utility power source. This situation is far worse than a short-circuit. If the unit survives the condition, it will shutdown until correction is made.

## GOING ON VACATIONS

1. Must put the UPS ON/OFF Switch in OFF Position.
2. If forget to Switch OFF the UPS, you can enable Holiday Mode, through mobile application remotely.

## DO'S & DON'TS RELATED TO UPS

### Do's Related to UPS

- ✓ Unplug and Switch OFF the UPS before touching or cleaning the surface.
- ✓ Unplug the UPS from the wall outlet during a Lightening Strom.

### Don'ts Related to UPS

- ☒ Don't block the bottom ventilation slots by cloth or other material it may result in fire hazard.
- ☒ Don't place the UPS near radiation or heat source.
- ☒ Don't Install near Kitchen Sink, Laundry, Wash Bowl, Bath Tub or Swimming Pool.

### In case of any Service requirement:

1. Register Complaint through Mobile App and monitor the Complaint Status OR
2. Contact Microtek Customer Care, specifying following details:
  - (i) **Model Number & Serial Number of the Product.**
  - (ii) **Name & phone no. of the contact person with full address & e-mail ID if any.**
  - (iii) **Reported problem/description of the complaint.**

**Note:** (a) Refer all servicing queries to Microtek Customer Care only.  
(b) Please take care that Serial Number is kept intact and that the product is not allowed to be fiddled (opened) by any unauthorised person; otherwise the warranty will be void.

### MICROTEK CUSTOMER CARE:

ALL INDIA: 7283838383 WHATSAPP: 8800255733 E-mail: cc@microtek.in

\*All disputes subject to Delhi jurisdiction only.

## **MICROTEK INTERNATIONAL P. LTD.**

H-57, Udyog Nagar, Rohtak Road, New Delhi-110041.

## POST WARRANTY ANNUAL MAINTENANCE CONTRACT (AMC)

Microtek Offers Annual Maintenance Contract to save you from any inconvenience in case of a product failure post warranty. Various options are available in select cities for all models of Microtek Products:-

***For Details, Contact nearest Microtek Branch or  
e-mail at: ho@microtek.in***

---

### INSTRUMENT DESCRIPTION

#### MICROTEK LUXE WIFI PURE SINEWAVE LCD EXTERNAL BATTERY UPS

##### Single Battery (12V) System:

UPS LUXE WIFI 1400, 12V SW  
(MTK190Y14SL)

☐

SERIAL NO.

**Authorised Dealer Stamp  
with Signatures**

Vend. C:

Form No.: QPN/003-461

Issue No.: 01, 07/06/2024 (Part Code:902-WF1-1400)

002-511-LUXE WIFI-1400 SW V.1